

SORTER TYPE SK603 & SK604

RELIABLE POTATO SORTING

Compact potato sorter with a capacity of 3-4 tons per hour. Now featuring upgraded rubber screens.





Functions:

Oversize and undersize material is discharged from the sides of the machine, while the two middle size fractions are conveyed to each side of the roller table. The roller table also features a narrow central channel for rejects.

Standard equipment:

- Speed control on the sorter, elevator and roller table
- PVC rollers on the roller table with grooved bearings
- Continuous and intermittent riddle operation for precise sizing
- Main switch conveniently located on the roller table
- Central electrical connection via CEE plug
- Integrated lighting on the roller table




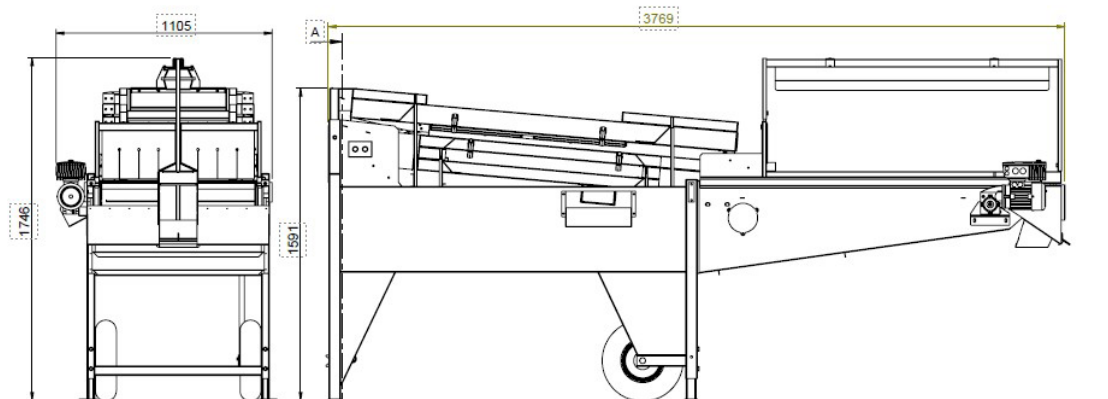

Type	Capacity	No of gradings	Riddles	Motor	Weight
SK603/ SK604	Up to 3/4 tons i timen	3/4	600x1000 mm	3x400V/1,1 kW	275 kg

Elevator	Belt width	Belt length	Motor	Weight
TPM11 300x2500	300 mm	2500 mm	3x400V/ 0,37kW	75 kg

Roller table	Roller width	Roller length	Motor	Weight
TPM11 300x2500	300 mm	2500 mm	3x400V/ 0,37kW	125 kg



SKALS MACHINERY A/S

Pottemagervej 14 | DK-7100 Vejle | Denmark | Tel: +45 8725 6200 | skals@skals.dk | www.skals.dk | CVR / VAT 17 21 80 18